




AU-04LAF

IP INDOOR VIDEO ENTRY PHONE

Description

The AU-04LAF video intercom features a built-in Wi-Fi module, allowing for quick and easy connection to your home network without the need for additional wiring.



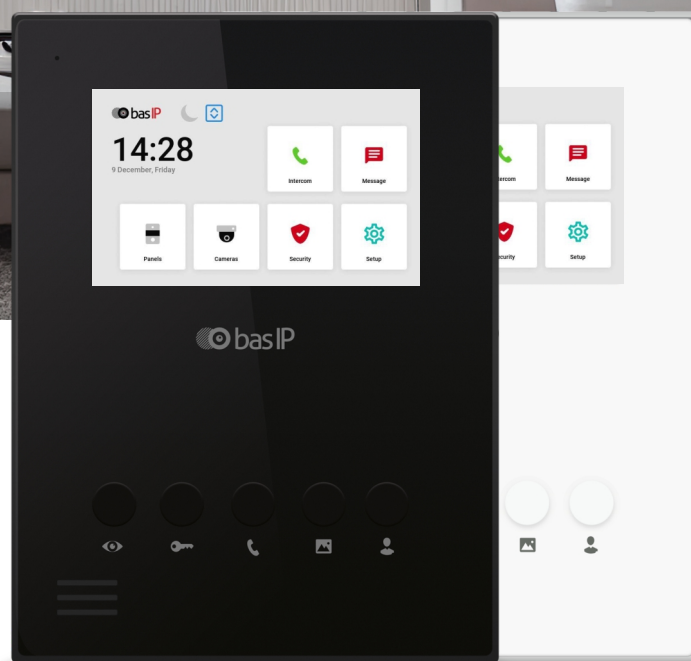






This makes installation and use of the intercom extremely convenient. Additionally, there's an option to connect an extra SP-AU handset for private conversations.



Specifications

Display	4.3" TFT LCD, capacitive touchscreen
Screen resolution	480 x 272
Built-in camera	No
Supported network protocol type	IPv4
Network connection	1 PoE port IEEE 802.3af
Wi-Fi	2.4GHz (IEEE 802.11b/g/n)
Supported codec type	G.711μ / G.711a
Power	PoE and + 12 V DC
Power consumption	6 W, standby 2.5 W
Dimensions	135×185×30 mm (without SP-AU) 195×185×30 mm (with SP-AU)
Colors	Black / White
Body	Plastic
Installation Type	Wall mount

Main features

 4,3" TFT touch screen	 Connection of the door bell
 Wi-Fi connection	 SIP-P2P
 PoE and +12V DC	 Alarm: 4 inputs for sensors
 Record photo to internal memory	 Viewing IP cameras in the standby mode
 Multilanguage, graphic interface	 Home automation control

Possibilities of connection

Number of individual panels	Up to 9 panels
Number of multi-apartment panels	Up to 9 panels
Connection of additional monitors	Up to 8 monitors


Possibilities of connection

Memory function	Recording of photos into internal memory (64 photos)
Interface	Multi-language graphical and WEB interface
Number of IP cameras	Up to 8 cameras
Alarm	8 inputs for sensors


Functional capabilities

Intercom Type	Audio Intercom
Scenarios	Yes
Autoanswer	Yes
Receiving messages	Yes
Calling the lift to the floor	Yes
Standby mode	Yes, customizable by time
Selection of the screensaver type in standby mode	IP camera single (constant viewing) / IP camera tour
Silent mode	Yes, customizable by time
Software update	from the web interface / from BAS-IP updates server
Additional	SIP P2P / Select language when you first start the system / Ability to set the auto-completion of the call after opening the lock / Possibility of partial or complete deletion of entries in the call list

Color variations

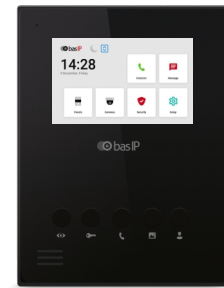


BLACK

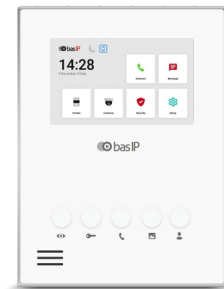


WHITE


Appearance and mechanical mounting

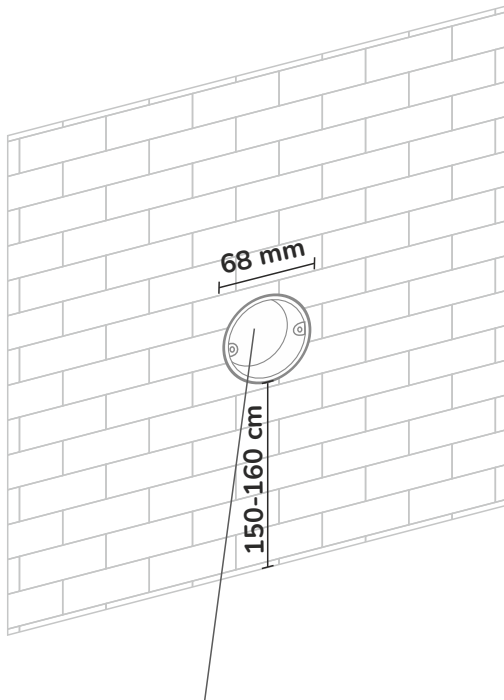

Niche

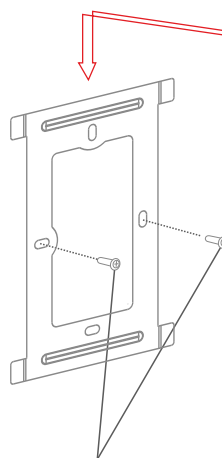

Screws

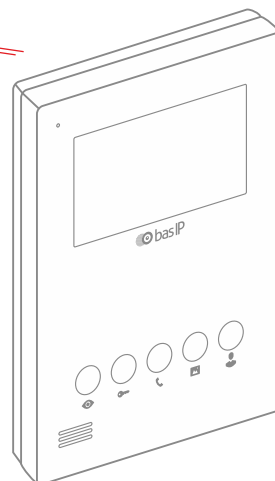

Monitor